

تقنيات رياضية و برمجية في نمذجة النظم الديناميكية باستخدام نموذج فضاء الحالة و نموذج تابع النقل



العام الدراسي 2023-2024

د. محمد خير عبدالله محمد



Contents

State Space to Transfer Function

Matlab Function ss2tf: State Space to Transfer Function

Transfer Function Model to State Variable Model

Matlab Function tf2ss: Transfer Function to State Space

Conversion of multi-input single-output model

Applications with Matlab

State Space to Transfer Function

Consider the standard state variable description of a control system

$$\frac{dx}{dt} = Ax(t) + Bu(t)$$

$$y(t) = Cx(t)$$

Taking Laplace transforms of this equation gives

$$sX(s) - x(0) = AX(s) + BU(s)$$

$$Y(s) = CX(s)$$

Rearranging the expression for $X(s)$ gives

$$(sI - A)X(s) = x(0) + BU(s)$$

$$X(s) = (sI - A)^{-1}x(0) + (sI - A)^{-1}BU(s)$$

The output equation is given by



$$\mathbf{Y}(s) = \mathbf{C}\mathbf{X}(s) = \mathbf{C}(s\mathbf{I}-\mathbf{A})^{-1}\mathbf{B}\mathbf{U}(s) + \mathbf{C}(s\mathbf{I}-\mathbf{A})^{-1}\mathbf{x}(0)$$

If we set the input conditions to zero, $\mathbf{x}(0) = 0$, we note that the output $\mathbf{Y}(s)$ is related to the input $\mathbf{U}(s)$ as follows

where

$$\mathbf{G}(s) = \mathbf{C}(s\mathbf{I}-\mathbf{A})^{-1}\mathbf{B}$$

Example

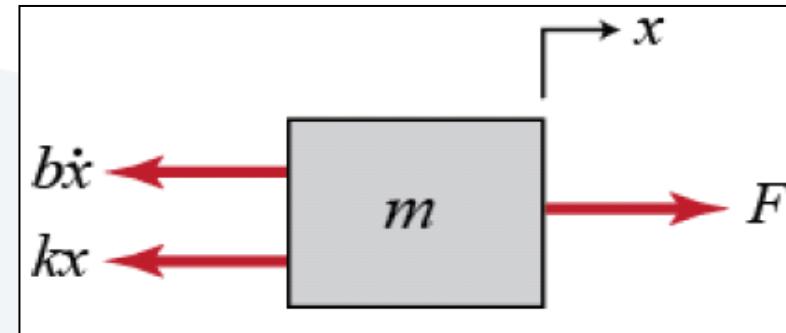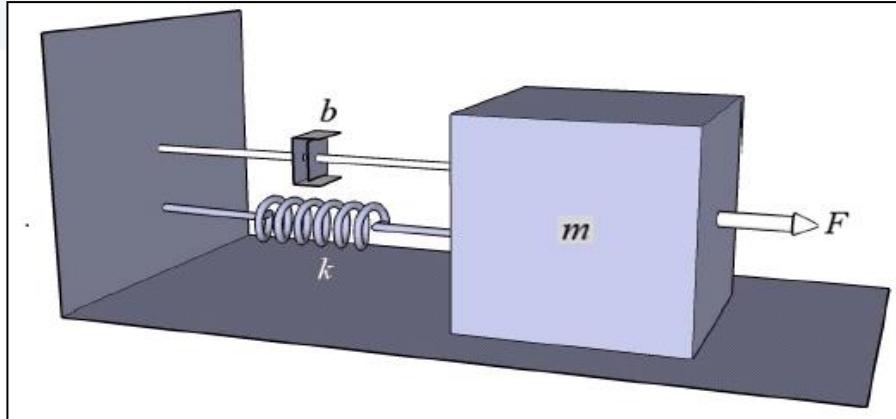

$$\Sigma F_x = F(t) - b\dot{x} - kx = m\ddot{x}$$

m=1;
k=0.1;
b=0.1;
F=1;

$$\begin{bmatrix} \dot{x} \\ \ddot{x} \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ -\frac{k}{m} & -\frac{b}{m} \end{bmatrix} \begin{bmatrix} x \\ \dot{x} \end{bmatrix} + \begin{bmatrix} 0 \\ \frac{1}{m} \end{bmatrix} F(t)$$

$$y = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ \dot{x} \end{bmatrix}$$

Example

$$Y(S) = C(SI - A)^{-1} \cdot B \cdot U(s) + C(SI - A)^{-1} \cdot X(0)$$

$$A = \begin{bmatrix} 0 & 1 \\ -0.1 & -0.1 \end{bmatrix}$$

$$B = [0; 1] , \quad C = [1 \ 0; 0 \ 1]$$

$$SI - A = S \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} - \begin{bmatrix} 0 & 1 \\ -0.1 & -0.1 \end{bmatrix}$$

$$SI - A = \begin{bmatrix} S & -1 \\ 0.1 & S + 0.1 \end{bmatrix}$$

$$\det(SI - A) = (S + 0.1)(S) + 0.1$$

$$\det(SI - A) = S^2 + 0.1S + 0.1$$

$$(SI - A)^{-1} = \frac{1}{S^2 + 0.1S + 0.1} \text{adj}(SI - A)$$

$$(SI - A)^{-1} = \frac{1}{S^2 + 0.1S + 0.1} \begin{bmatrix} S + 0.1 & 1 \\ -0.1 & S \end{bmatrix}$$

$$(SI - A)^{-1} = \begin{bmatrix} \frac{s+0.1}{s^2 + 0.1s + 0.1} & \frac{1}{s^2 + 0.1s + 0.1} \\ \frac{-0.1}{s^2 + 0.1s + 0.1} & \frac{s}{s^2 + 0.1s + 0.1} \end{bmatrix}$$

$$C(SI - A)^{-1}(B) = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} \frac{s+0.1}{s^2 + 0.1s + 0.1} & \frac{1}{s^2 + 0.1s + 0.1} \\ \frac{-0.1}{s^2 + 0.1s + 0.1} & \frac{s}{s^2 + 0.1s + 0.1} \end{bmatrix} \begin{pmatrix} 0 \\ 1 \end{pmatrix}$$

$$= \begin{bmatrix} \frac{s+0.1}{s^2 + 0.1s + 0.1} & \frac{1}{s^2 + 0.1s + 0.1} \\ \frac{-0.1}{s^2 + 0.1s + 0.1} & \frac{s}{s^2 + 0.1s + 0.1} \end{bmatrix} \begin{pmatrix} 0 \\ 1 \end{pmatrix}$$

$$= \begin{bmatrix} \frac{1}{s^2 + 0.1s + 0.1} \\ \frac{s}{s^2 + 0.1s + 0.1} \end{bmatrix}$$

Matlab Function ss2tf: State Space to Transfer Function

We note that the function `ss2tf` (and its counterpart `tf2ss`) are functions in the control toolbox in MATLAB. The form of the expression for `ss2tf` is given by

$$[num,den] = ss2tf(A,B,C,D,iu)$$

The inputs are the state variable matrices A,B,C and D. If there is no ‘D’ matrix in the model, then a D matrix must be created with zeros.

The input ‘iu’ is the input we are interested in, that is input number 1 or 2 , etc. If we need to find the transfer function matrix for all inputs we would have to enter the command several times changing the value of `iu`.

The output is given in the matrices ‘`num`’ and ‘`den`’. The denominator of each transfer function with a particular input will be the same, therefore `den` is a vector which contains the coefficients of the denominator polynomial.

Using Matlab:

```
A = [0 1;-0.1 -0.1];  
B = [0; 1];  
C = [1 0;0 1];  
D = [0;0];  
[num,den]=ss2tf(A,B,C,D,1)
```

```
num =  
    0      0   1.0000  
    0   1.0000  -0.0000  
den =  
 1.0000  0.1000  0.1000
```

$$\frac{1}{S^2 + 0.1S + 0.1}$$
$$\frac{S}{S^2 + 0.1S + 0.1}$$

Transfer Function to State Space

The following transfer function describes the dynamics of an actuator.


$$Y(s) = \frac{1}{(s + 4)(s^2 + 4s + 7)} U(s) = \frac{1}{(s^3 + 8s^2 + 23s + 28)} U(s)$$

If we write

$(s^3 + 8s^2 + 23s + 28) Y(s) = U(s)$, we can see that this is equivalent to the differential equation given by

$$\frac{d^3y(t)}{dt^3} + 8 \frac{d^2y(t)}{dt^2} + 23 \frac{dy(t)}{dt} + 28 y(t) = u(t)$$

We let the first state, $x_1(t)$ be equivalent to the output $y(t)$, the second state equal its derivative, the third state equal the next derivative and so on

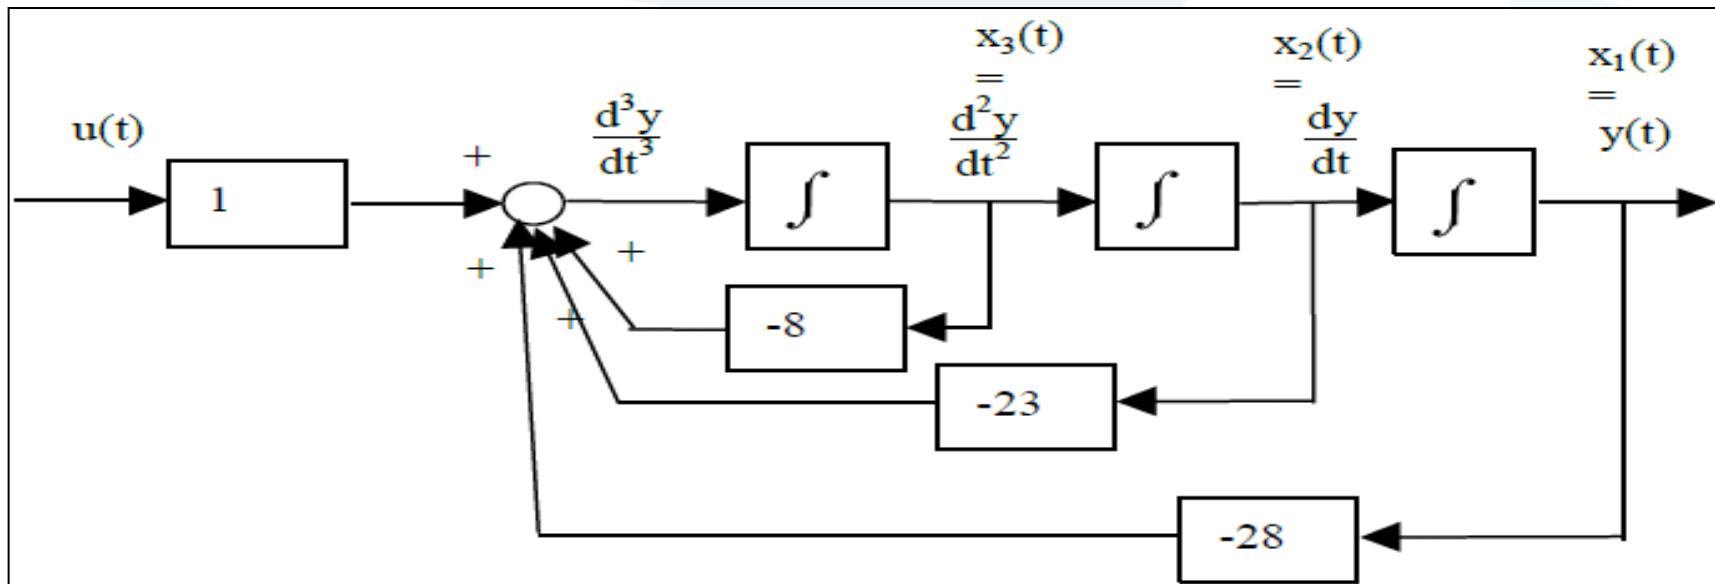

Therefore we can write

$$x_1(t) = y(t)$$

$$\frac{dx_1}{dt} = x_2(t) = \frac{dy}{dt}$$

$$\frac{dx_2}{dt} = x_3(t) = \frac{d^2y}{dt^2}$$

The full differential equation above can be rewritten in terms of its highest derivative:

$$\frac{d^3y(t)}{dt^3} = -8 \frac{d^2y(t)}{dt^2} - 23 \frac{dy}{dt} - 28 y(t) + u(t)$$

and the state variable notation introduced to give

$$\frac{dx_3(t)}{dt} = -8x_3(t) - 23x_2(t) - 28 x_1(t) + u(t)$$

This gives us the following state variable system

$$\begin{bmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \\ \dot{x}_3(t) \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -28 & -23 & -8 \end{bmatrix} \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} u(t)$$

$$y(t) = [1 \ 0 \ 0]x(t)$$

In the above example, the numerator was simply a ‘1’. We would like to know how to deal with situations where the numerator is a polynomial in s .

For illustration we consider the same transfer function as above but add a lead term in the numerator; this gives,

$$Y(s) = \frac{28(2s + 1)}{(s + 4)(s^2 + 4s + 7)} U(s) = \frac{(56s + 28)}{(s^3 + 8s^2 + 23s + 28)} U(s)$$

We can rewrite this expression as

$$\frac{Y(s)}{U(s)} = \frac{X(s)}{U(s)} \frac{Y(s)}{X(s)}$$

where


$$X(s) = \frac{1}{(s^3 + 8s^2 + 23s + 28)} U(s)$$

and

$$Y(s) = (56s + 28) X(s)$$

The transfer function from $U(s)$ to $X(s)$ is similar to the example above. However, the additional equation is for $Y(s)$. This can be converted back to a differential equation to give

$$y(t) = 56 \frac{dx}{dt} + 28 x(t)$$

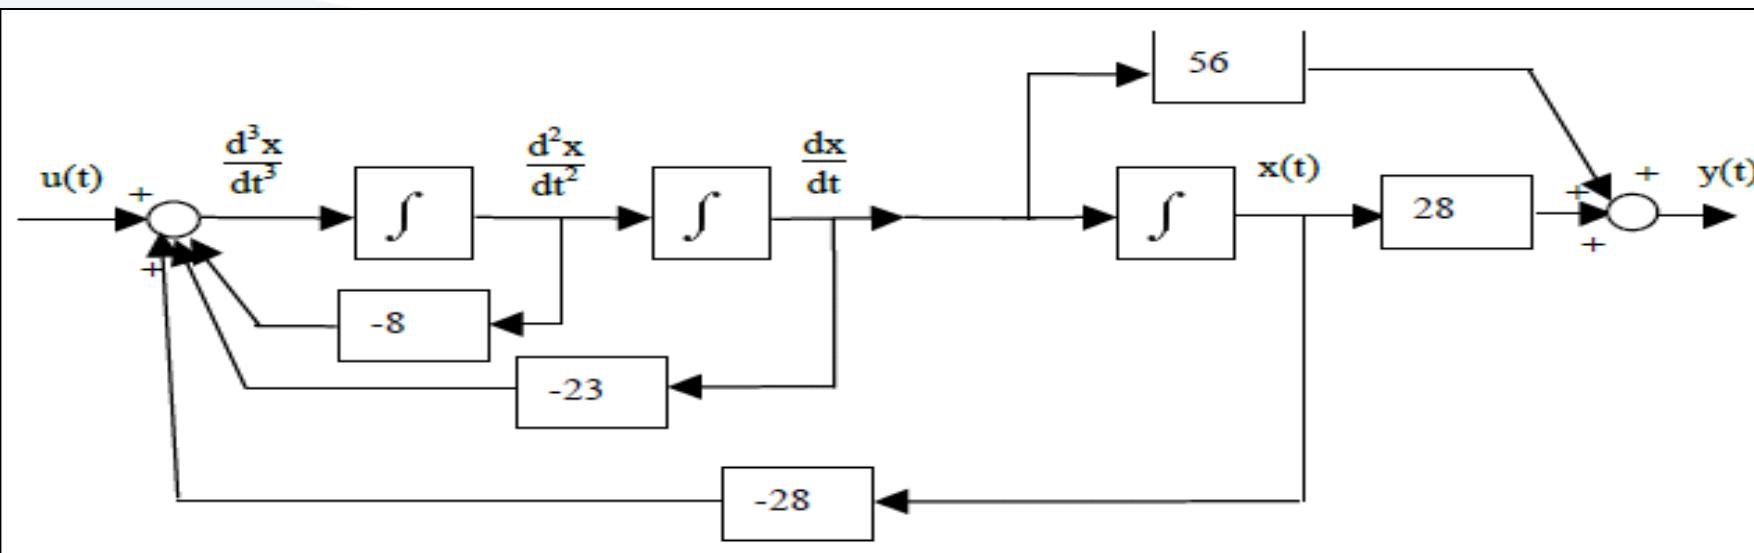

Using the state variable notation
 $y(t) = 56x_2(t) + 28 x_1(t)$

Therefore in matrix form we have the output equation as
 $y(t) = [28 \ 56 \ 0] x(t)$

with the state equations given as before

$$\begin{bmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \\ \dot{x}_3(t) \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -28 & -23 & -8 \end{bmatrix} \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} u(t)$$

Example

$$Y_1(s) = \frac{1}{s^2 + 0.1s + 0.1} U(s) \quad Y_2(s) = \frac{s}{s^2 + 0.1s + 0.1} U(s)$$

$(s^2 + 0.1s + 0.1) Y(s) = U(s)$, we can see that this is equivalent to the differential equation given by

$$\frac{d^2y(t)}{dt^2} + 0.1 \frac{dy}{dt} + 0.1y(t) = u(t)$$

$$\frac{d^2y(t)}{dt^2} = -0.1 \frac{dy}{dt} - 0.1y(t) + u(t)$$

Therefore we can write

$$x_1(t) = y(t)$$

$$\frac{dx_1}{dt} = x_2(t) = \frac{dy}{dt}$$

$$\frac{dx_2(t)}{dt} = -0.1x_2(t) - 0.1x_1(t) + u(t)$$

This gives us the following state variable system

$$\begin{bmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ -0.1 & -0.1 \end{bmatrix} \begin{bmatrix} x_1(t) \\ x_2(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u(t)$$

$$y(t) = [1 \ 0]x(t)$$

$$Y_2(s) = \frac{s}{s^2 + 0.1s + 0.1} U(s)$$

We can rewrite this expression as

$$\frac{Y(s)}{U(s)} = \frac{X(s)}{U(s)} \frac{Y(s)}{X(s)}$$

$$X(s) = \frac{1}{s^2 + 0.1s + 0.1} U(s)$$

$$Y(s) = (s) X(s)$$

$$y(t) = \frac{dx}{dt}$$

Using the state variable notation

$$y(t) = x_2(t)$$

Therefore in matrix form we have the output equation as

$$y(t) = [0 \ 1] x(t)$$

Overall State Space Model

$$\begin{bmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ -0.1 & -0.1 \end{bmatrix} \begin{bmatrix} x_1(t) \\ x_2(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u(t)$$

$$y(t) = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} x(t)$$



Matlab Function tf2ss: Transfer Function to State Space

The form of the MATLAB expression: $[A,B,C,D] = \text{tf2ss}(\text{num},\text{den})$

The required inputs are

- (i) **num** : a matrix which contains the numerator coefficients for each transfer function in a particular row of the transfer function matrix.
- (ii) **den** is a vector containing the denominator polynomial coefficients

The resulting outputs are the state variable matrices **A, B, C** and **D**.

Using Matlab:

```
num = [1];
den=[1 0.1 0.1];
[A,B,C,D]=tf2ss(num,den)
```

A =

-0.1000	-0.1000
1.0000	0

B =

1
0

C =

0	1
---	---

D =

0

```
num = [1 0];
den=[1 0.1 0.1];
[A,B,C,D]=tf2ss(num,den)
```

A =

-0.1000	-0.1000
1.0000	0

B =

1
0

C =

1	0
---	---

D =

0

Conversion of multi-input single-output model

Example


Convert the following state variable model which has two inputs to transfer function format. Assume zero initial conditions.

$$\dot{x}(t) = \begin{bmatrix} -6.3 & 3 \\ 0.5 & -5.4 \end{bmatrix}x(t) + \begin{bmatrix} 1 & 0.1 \\ 0.2 & 1 \end{bmatrix}u(t)$$
$$y(t) = [1 \ 0] x(t)$$

Solution

We enter the A,B,C and D matrices as follows:

$$A=[-6.3 \ 3; 0.5 \ -5.4]; B=[1 \ 0.1; 0.2 \ 1]; C=[1 \ 0]; D=[0 \ 0];$$

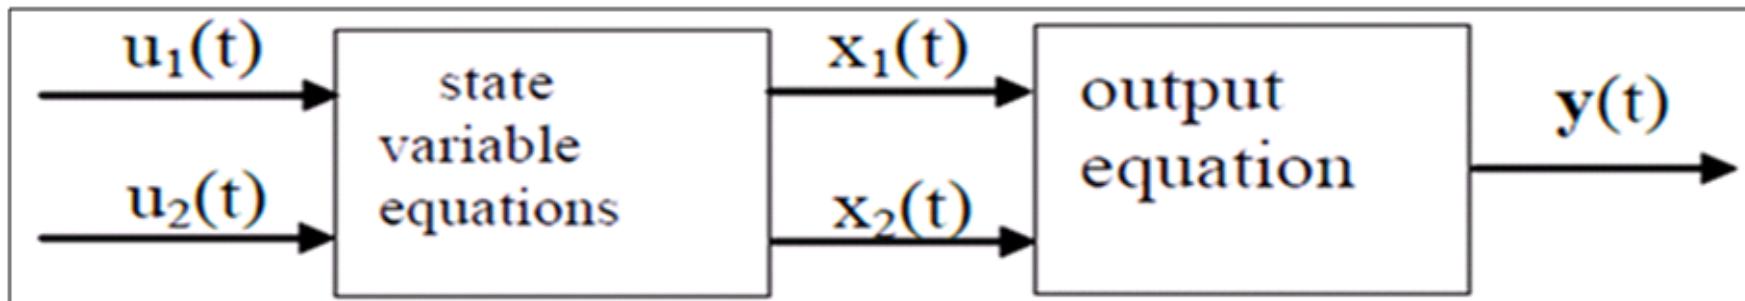

In our problem, we will find a transfer function model of the form:

$$\begin{bmatrix} X_1(s) \\ X_2(s) \end{bmatrix} = \begin{bmatrix} G_{11}(s) & G_{12}(s) \\ G_{21}(s) & G_{22}(s) \end{bmatrix} \begin{bmatrix} U_1(s) \\ U_2(s) \end{bmatrix} \quad \mathbf{Y}(s) = \mathbf{C}(s\mathbf{I}-\mathbf{A})^{-1}\mathbf{B} \quad \mathbf{U}(s) = \mathbf{G}(s)\mathbf{U}(s)$$
$$\mathbf{G}(s) = \mathbf{C}(s\mathbf{I}-\mathbf{A})^{-1}\mathbf{B}$$

$$Y(s) = [1 \ 0] \begin{bmatrix} X_1(s) \\ X_2(s) \end{bmatrix}$$

$$Y(s) = [1 \ 0] \begin{bmatrix} X_1(s) \\ X_2(s) \end{bmatrix} = X_1(s) = [G_{11}(s) \ G_{12}(s)] \begin{bmatrix} U_1(s) \\ U_2(s) \end{bmatrix}$$

The output $Y(s)$ will depend on each input $U_1(s)$ and $U_2(s)$ through the transfer functions $G_{11}(s)$ and $G_{12}(s)$ respectively. The function `ss2tf` only provides one transfer function at each call of the function, so we must use it twice:

[num1,den1]=ss2tf(A,B,C,D,1)

num1 =

$$\begin{matrix} 0 & 1 & 6 \end{matrix}$$

den1 =

$$\begin{matrix} 1.0000 & 11.7000 & 32.5200 \end{matrix}$$

This gives $G_{11}(s) = \frac{s + 6}{s^2 + 11.7 s + 35.52}$. Applying the function again for input 2 gives

[num2,den2]=ss2tf(A,B,C,D,2)

num2 =

$$\begin{matrix} 0 & 0.1000 & 3.5400 \end{matrix}$$

den2 =

$$\begin{matrix} 1.0000 & 11.7000 & 32.5200 \end{matrix}$$

We find that $G_{12}(s) = \frac{s + 3.54}{s^2 + 11.7 s + 35.52}$

Therefore

$$Y(s) = \frac{s + 6}{s^2 + 11.7 s + 35.52} U_1(s) + \frac{s + 3.54}{s^2 + 11.7 s + 35.52} U_2(s)$$

Applications with Matlab


Example

```
num = [25];
den = [1 6 25];
t = 0:0.005:5;
step(num,den,t)
grid
[y,x,t] = step(num,den,t);
[ymax,tp] = max(y);
peak_time =
max_overshoot =
settling_time =
s = length(t);
while y(s) > 0.98*y(end)& y(s) < 1.02*y(end)
    s = s - 1;
end
settling_time = s*0.005
```

peak_time =
0.7900

max_overshoot =
0.0948

settling_time =
1.1900

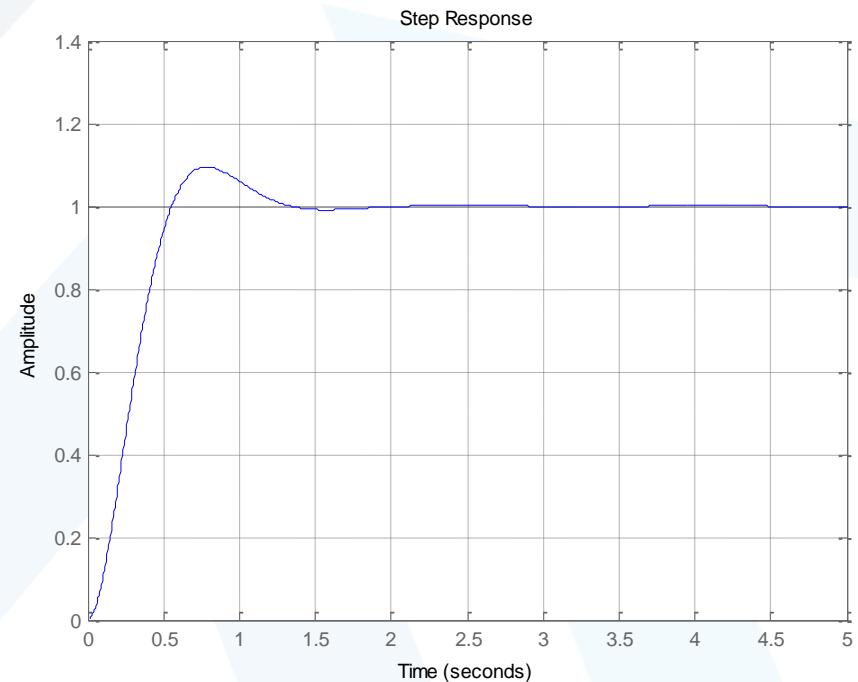


Example

```
num = [6.3223 18 12.811];
den = [1 6 11.3223 18 12.811];
t = 0:0.02:20;
[y,x,t] = step(num,den,t);
plot(t,y)
grid
[ymax,tp] = max(y);
peak_time = tp*0.02
max_overshoot = ymax-y(end)
s = length(t);
while y(s) > 0.98 *y(end)& y(s) < 1.02*y(end)
    s = s-1;
end
settling_time = s*0.02
```

peak_time =
1.6800

max_overshoot =
0.6184

settling_time =
10.06

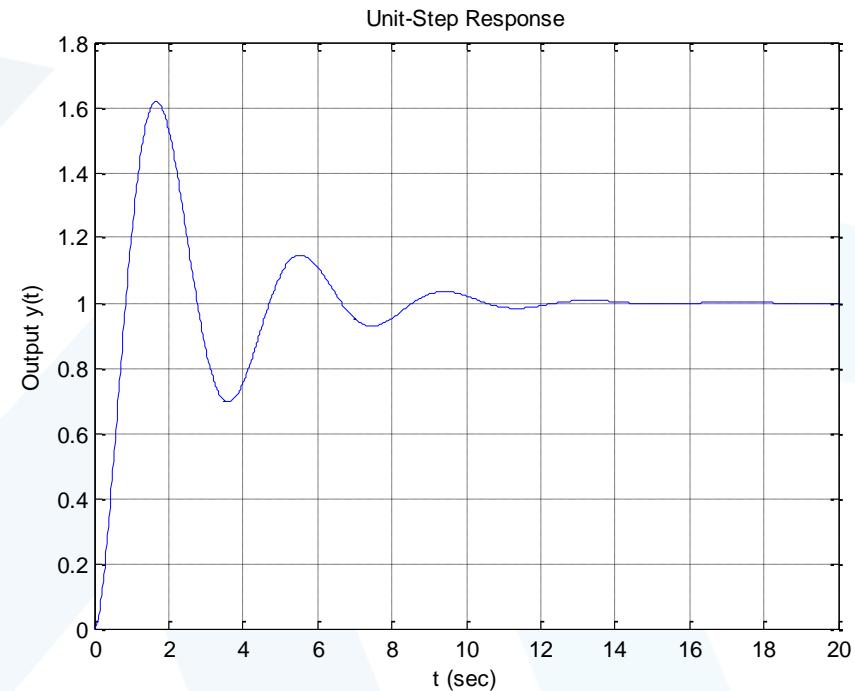


Example

Using the **lsim** command, obtain the unit-ramp response of the following system:

$$\frac{C(s)}{R(s)} = \frac{2s + 1}{s^2 + s + 1}$$

```
num = [2 1];
den = [1 1 1];
t = 0:0.1:10;
r = t;
y = lsim(num,den,r,t);
plot(t,r,'-',t,y,'o')
grid
```

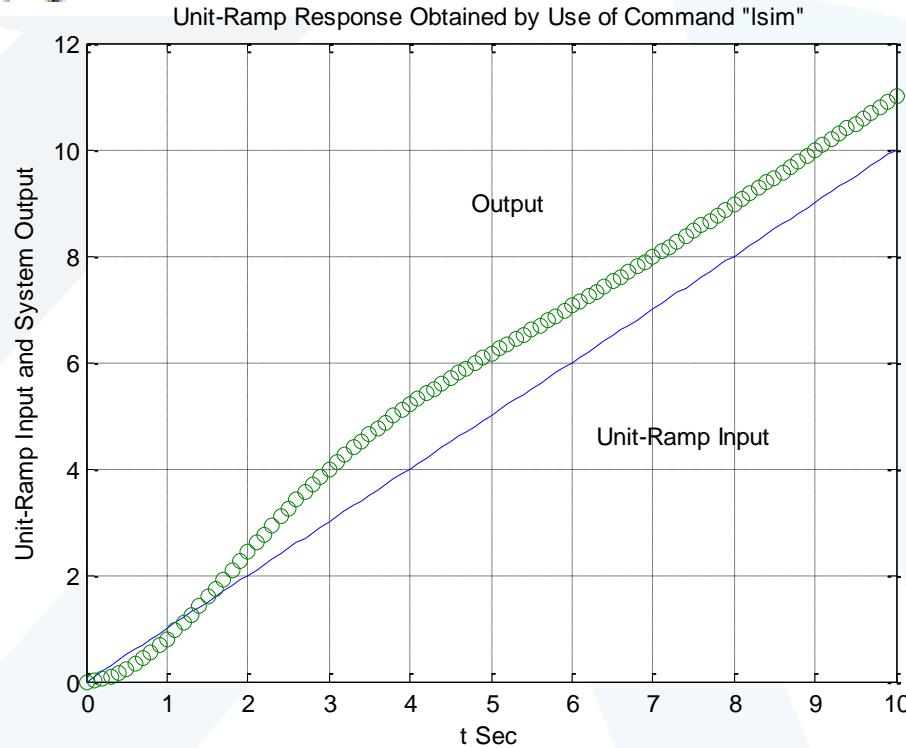

Obtaining Response to Initial Condition by Use of Command **Initial**. If the system is given in the state-space form, then the following command

`initial(A,B,C,D,[initial condition],t)`

will produce the response to the initial condition.

Suppose that we have the system defined by

$$\dot{\mathbf{x}} = \mathbf{Ax} + \mathbf{Bu}, \quad \mathbf{x}(0) = \mathbf{x}_0$$


$$y = \mathbf{Cx} + \mathbf{Du}$$

where

$$\mathbf{A} = \begin{bmatrix} 0 & 1 \\ -10 & -5 \end{bmatrix}, \quad \mathbf{B} = \begin{bmatrix} 0 \\ 0 \end{bmatrix}, \quad \mathbf{C} = [0 \ 0], \quad \mathbf{D} = 0$$

$$\mathbf{x}_0 = \begin{bmatrix} 2 \\ 1 \end{bmatrix}$$

```
t = 0:0.05:3;  
A = [0 1;-10 -5];  
B = [0;0];  
C = [0 0];  
D = [0];  
[y,x] = initial(A,B,C,D,[2;1],t);  
x1 = [1 0]*x';  
x2 = [0 1]*x';  
plot(t,x1,'o',t,x1,t,x2,'x',t,x2)  
grid  
title('Response to Initial Condition')  
xlabel('t Sec')  
ylabel('State Variables x1 and x2')  
gtext('x1')  
gtext('x2')
```

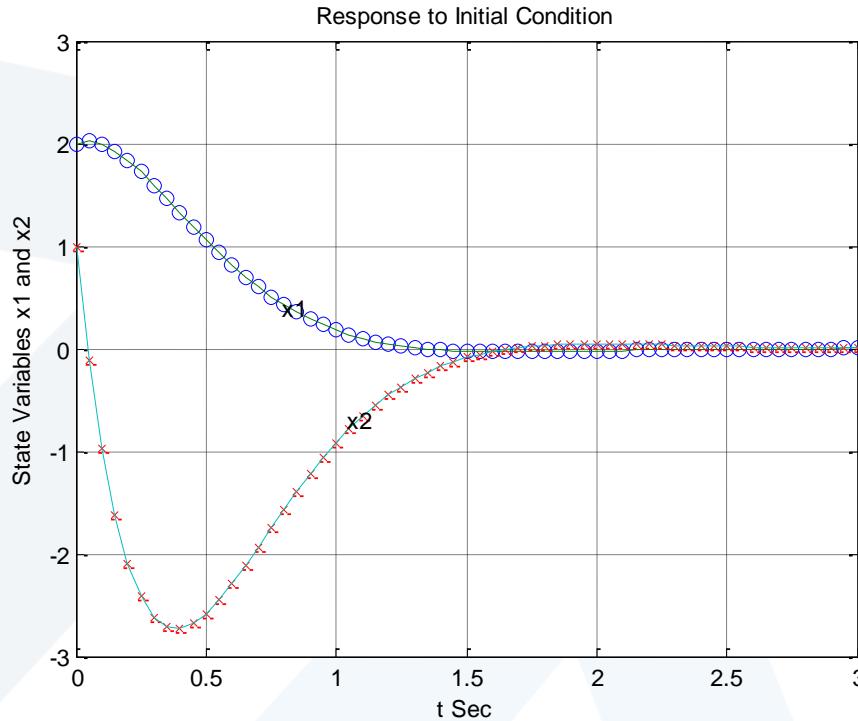

Example

Consider the following system that is subjected to the initial condition. (No external forcing function is present.)

$$\ddot{y} + 8\dot{y} + 17y + 10y = 0$$

$$y(0) = 2, \quad \dot{y}(0) = 1, \quad \ddot{y}(0) = 0.5$$

Obtain the response $y(t)$ to the given initial condition.

By defining the state variables as

$$x_1 = y$$

$$x_2 = \dot{y}$$


$$x_3 = \ddot{y}$$

we obtain the following state-space representation for the system:

$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \\ \dot{x}_3 \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -10 & -17 & -8 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix}, \quad \begin{bmatrix} x_1(0) \\ x_2(0) \\ x_3(0) \end{bmatrix} = \begin{bmatrix} 2 \\ 1 \\ 0.5 \end{bmatrix}$$

$$y = [1 \ 0 \ 0] \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix}$$

```
t = 0:0.05:10;  
A = [0 1 0;0 0 1;-10 -17 -8];  
B = [0;0;0];  
C = [1 0 0];  
D = [0];  
y = initial(A,B,C,D,[2;1;0.5],t);  
plot(t,y)  
grid  
title('Response to Initial Condition')  
xlabel('t (sec)')  
ylabel('Output y')
```

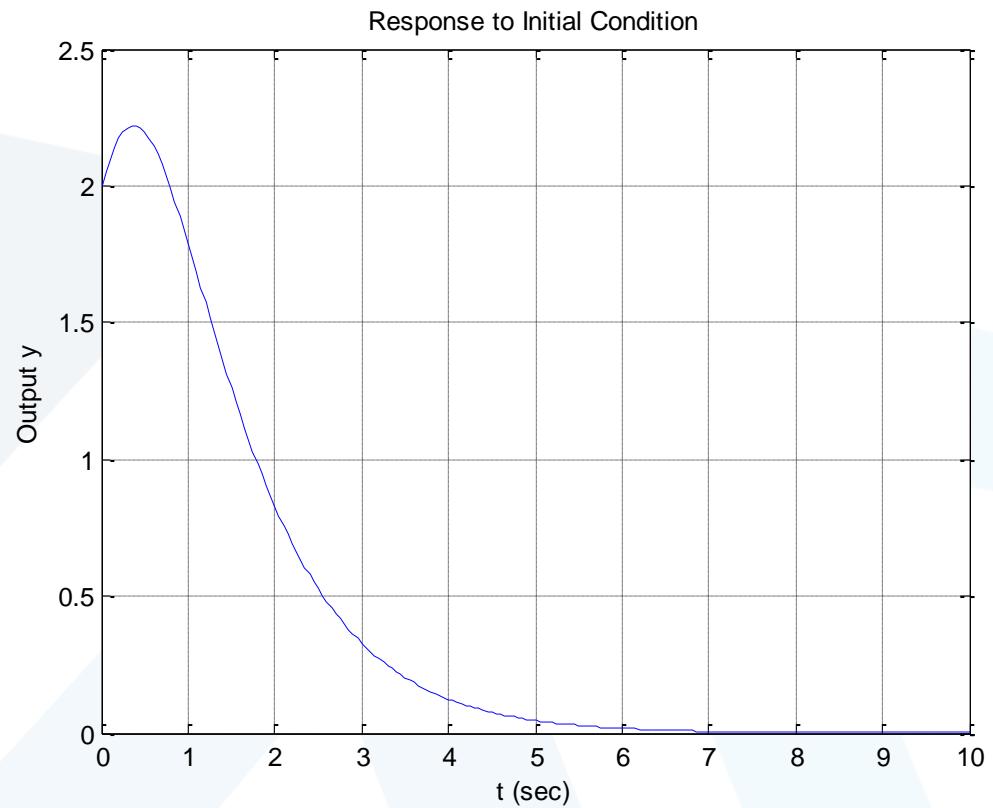



انتهت المحاضرة